

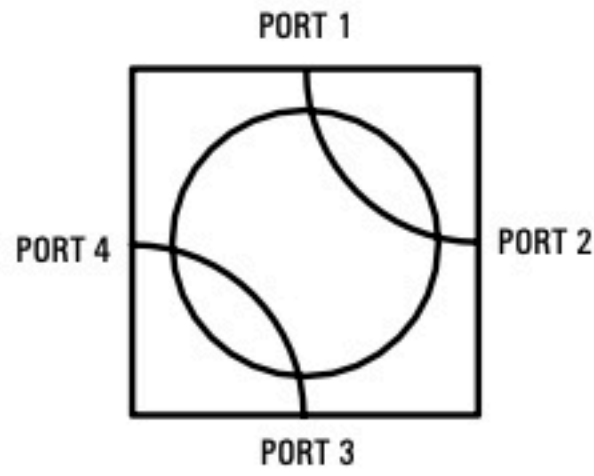


ELECTRICAL ARRANGEMENT OF THE STANDARD SWITCH DRIVER

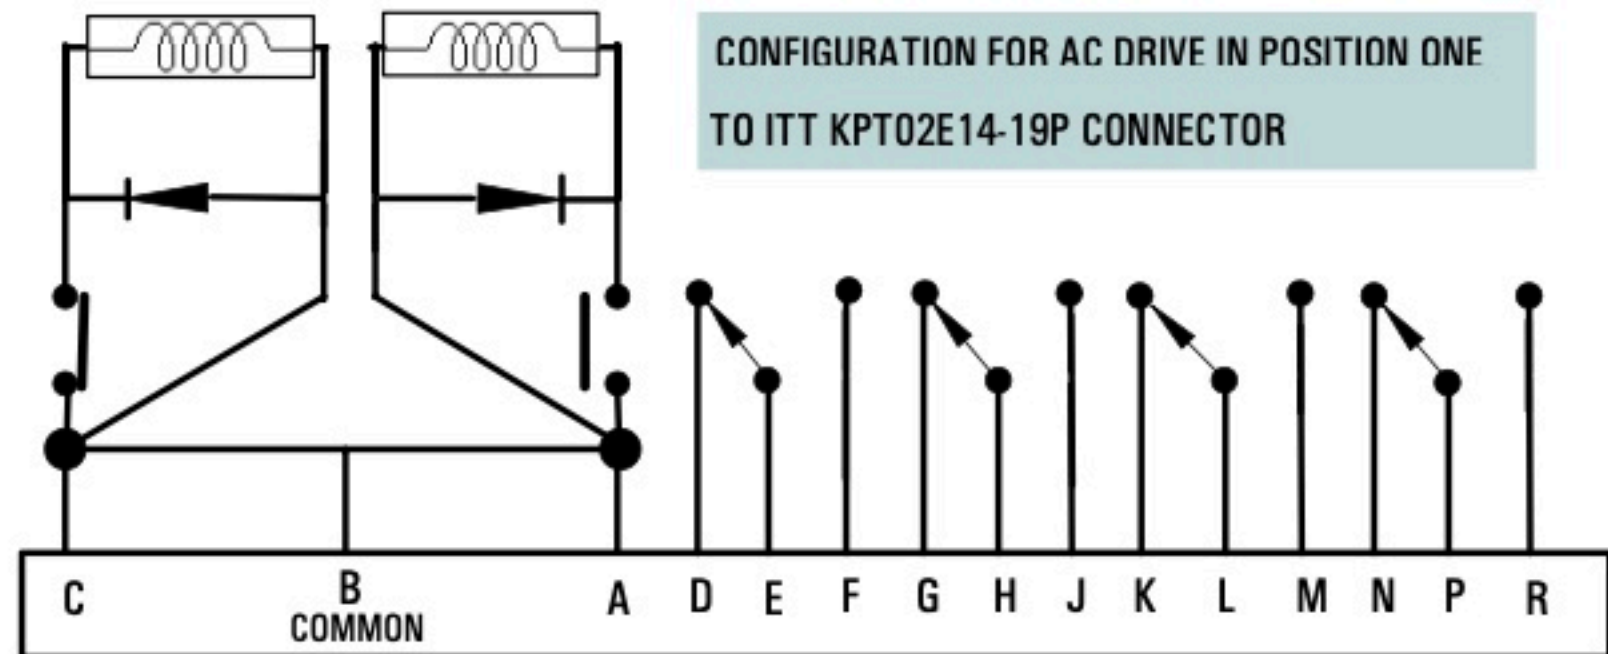

POSITION 1 OF THE RF PORTS

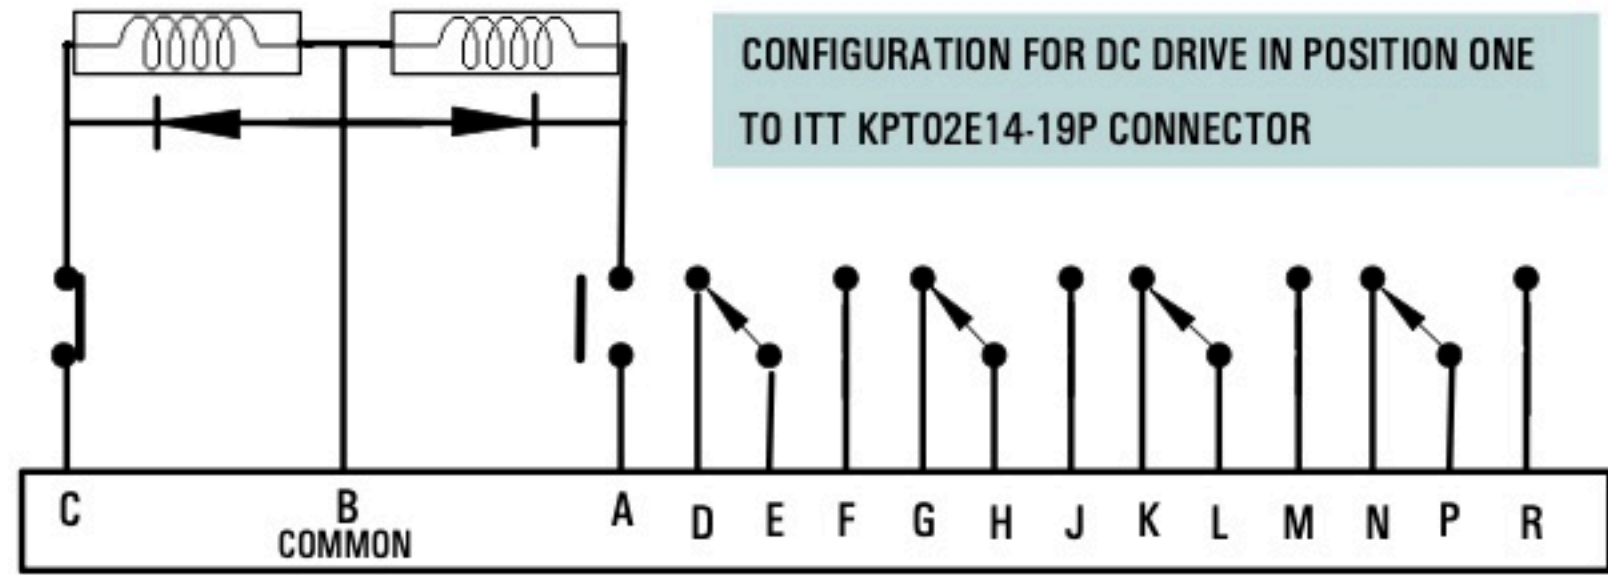

Note 1: Some or all of the C-form contacts can be replaced by inhibit contacts.

Note 2: Other connectors are available ranging between 6 pins and 19 pins.

Note 3: 115 VAC and 220VAC drivers are standard .

MAX. CURRENT/VOLTAGES TO OPERATE AST SWITCHES			
WG SIZE	+ - 12V	+ - 24V	+ - 48V
WR 229	6.0 AMPS	3.0 AMPS	1.5AMPS
WR 187	5.0 AMPS	2.2 AMPS	1.2 AMPS
WR 159	4.0 AMPS	2.0 AMPS	1.1 AMPS
WR 137/112	3.0 AMPS	1.5 AMPS	.8 AMPS
WR 90 AND SMALLER INCL. ALL COAXIAL	2.9 AMPS	1.4 AMPS	.75 AMPS